



Model number

RLG28-55/40a/73c/136

Retro-reflective area sensor
connector M12 x 1, 4-pin

Features


- Retro-reflective area sensor with 6 light beams in standard photoelectric-sensor enclosure
- Connection compatibly replaces single beam photoelectric sensor
- Reliable detection of the front edge of the object irrespective of its shape and position
- Constant object detection from 12 mm within the entire detection area
- Reliable detection of all surfaces irrespective of the object texture
- Switches when contrast difference 10%
- Bright, highly visible transmitter beams, guarantee convenient alignment of the sensor

Description

The RLG28 retro-reflective area sensor contains several transmitters and receivers in one housing and with a reflector positioned opposite forms a 60 mm detection area over a sensing range of 4 m.


When the light beams are interrupted by an object, the switching function is triggered. The smallest detectable object size is 12 mm. The RLG28 switches at a 10% contrast difference with a response time of 1 ms. An intelligent gain control compensates for effects such as dirt, misalignment, and temperature.

Dimensions

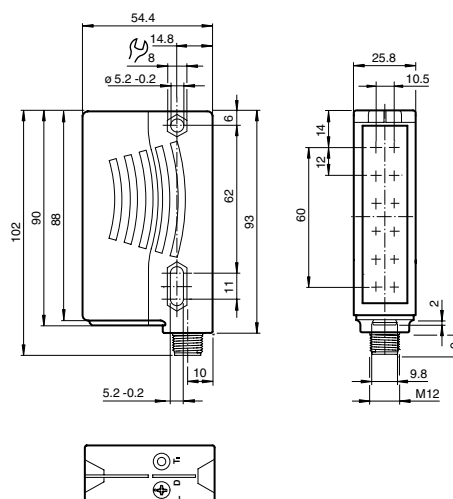


Electrical connection

Option:




○ = Light on
● = Dark on

Pinout



Indicators/operating means

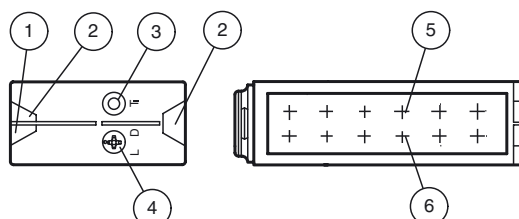

1	Operating display	green
2	Signal display	yellow
3	TEACH-IN button	
4	Light/dark switch	
5	Emitter	
6	Receiver	

**Technical data****General specifications**

Effective detection range	0 ... 4 m
Reflector distance	H60 reflector: 0.4 ... 4 m , H85-2 reflector: 0.2 ... 4 m , Foil reflector OFR-100/100: 0.4 ... 3 m
Threshold detection range	5.6 m
Sensing range	typical 60 mm , Object has to cover the reflector completely in one dimension
Reference target	H60 reflector , H85-2 reflector , Foil reflector OFR-100/100
Light source	LED, 625 nm
Light type	modulated visible red light
Approvals	CE, cULus
Diameter of the light spot	approx. 220 mm at detection range 4 m
Angle of divergence	+/- 2.5 °
Ambient light limit	5000 Lux
Resolution	12 mm

Functional safety related parameters

MTTF _d	310 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %

Indicators/operating means

Operating display	green LED, statically lit Power on Undervoltage indicator: Green LED, pulsing (approx. 0.8 Hz) short-circuit : LED green flashing (approx. 4 Hz)
Function display	2 LEDs yellow, light up when light beam is free, flash when falling short of the stability control, off when light beam is interrupted Teach-In : LED yellow/green; equiphase flashing; 2,5 Hz Teach Error: LED green/yellow non equiphase flashing; 8.0 Hz
Controls	rotary switch for light/dark , TEACH-IN key

Electrical specifications

Operating voltage	U _B	12 ... 30 V DC Power from Class 2 Power Source
Ripple		max. 10 %
No-load supply current	I ₀	max. 50 mA
Protection class		II, rated voltage ≤ 250 V AC with pollution degree 1-2 according to IEC 60664-1 functional insulation acc. to DIN EN 50178

Output

Switching type		light/dark on, switchable
Signal output		2 Push-pull outputs, complementary, short-circuit proof, reverse polarity protected
Switching voltage		max. 30 V DC
Switching current		max. 100 mA
Voltage drop	U _d	≤ 2.5 V DC
Switching frequency	f	230 Hz
Response time		1 ms

Ambient conditions

Ambient temperature	-30 ... 60 °C (-22 ... 140 °F)
Storage temperature	-40 ... 70 °C (-40 ... 158 °F)

Mechanical specifications

Protection degree	IP67
Connection	connector M12 x 1, 4-pin
Material	
Housing	Plastic ABS
Optical face	Plastic pane
Mass	100 g

Compliance with standards and directives

Directive conformity	
Low Voltage Directive 2006/95/EC	EN 60947-5-2
EMC Directive 2004/108/EC	EN 60947-5-2

Accessories**OMH-05**

Mounting aid

OMH-07

Mounting aid

OMH-21

Mounting aid

OMH-RLK29-HW

Mounting aid

OMH-K01

Mounting aid

REFLEKTOR H60

Reflector

REFLEKTOR H85-2

Reflector

V1-G-2M-PVC

Cable connector

V1-W-2M-PVC

Cable connector

V1-G-2M-PUR

Cable connector

V1-W-2M-PUR

Cable connector

Additional accessories can be found in the Internet.

