

Technical Specifications

Pressure measuring range (mH2O)

	1 ... 5	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 200 bar
Accuracy, (1), (\pm % FS)	$\leq \pm 0.25$	$\leq \pm 0.1$	$\leq \pm 0.1$
Thermal shift, (\pm % FS/$^{\circ}$C)			
Zero point 0...70 $^{\circ}$ C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25...85 $^{\circ}$ C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0...70 $^{\circ}$ C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25...85 $^{\circ}$ C	≤ 0.02	≤ 0.02	≤ 0.02
Total error, (2), (3), (\pm % FS)			
-10...50 $^{\circ}$ C, (typ. / max.)	$\leq 0.15 / 0.3$ (≤ 200 mbar: 0.3 / 0.6)	$\leq 0.15 / 0.3$	$\leq 0.15 / 0.3$
-25...85 $^{\circ}$ C, (typ. / max.)	$\leq 0.65 / 0.7$ (≤ 200 mbar: 0.65 / 0.8)	$\leq 0.65 / 0.7$	$\leq 0.55 / 0.7$
Long term stability, (4)	$\leq 0.5\%$ FS / < 4 mbar	$\leq 0.2\%$ FS / < 4 mbar	$\leq 0.1\%$ FS / < 0.2% FS

(1) Zero based accuracy according to DIN 16086, incl. hysteresis and repeatability at ambient temperature

(2) Total error including accuracy and temperature influences at maximum signal span (16 mA)

(3) Active compensated

(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-5...80 $^{\circ}$ C
Process temperature	-5...80 $^{\circ}$ C
Storage temperature	-10...80 $^{\circ}$ C

Electrical specifications

Resolution	0.025% FS
Output adjustable	
4 mA	-5% FS...105% FS
20 mA	-5% FS...105% FS
Span	25% FS...110% FS (≥ 0.5 mH2O)
Low pass filter	0.1 / 1 / 10 / 30 Hz (standard: 30 Hz)
Power supply	9...33 V DC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

Qualifications

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	4g (4...100 Hz / \pm 3.2 mmpp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dB μ V/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	4 kV contact 8 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...1 GHz)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	2 kV	Motors, valves
EN 61000-4-5	Surge	10 kA (8 / 20 μ s), (1)	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...80 MHz, 3 s)	Frequency converters

(1) Only with optional surge (lightning) protection

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (Standard), EPDM, Kalrez
Cable	PUR, FEP, PE

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview

Interface

101138	PTM - Interface

Software

101224	PC Software V1.50

Additional documents

Manuals

	Article number	Description
10.00.0079	DEB003	Configuration software
10.00.0089	DEB005	User manual

Operating and safety instructions

	Article number
10.00.0137	DMM009

Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type	PTM/N	32			
Pressure type	Gauge	1			
	Absolute (vacuum)	2			
Pressure measuring range	100 mbar ... 25 bar (1)	XX			
	Offset, special adjustment	99			
Process connection	Closed, (Fig. 1)	55			
	Open, (Fig. 2)	56			
	Closed, (1.4435), for ACS certification (Fig. 1)	59			
	G 1/4 M, (Fig. 3)	11			
	G 1/2 M, (Fig. 3)	13			
	Customized connection available	99			
Electrical connection	PE cable, black, IP 68, (3), (4)		13		
	PUR cable, black, IP 68, (3), (5)		15		
	FEP cable, black, IP 68, (3)		21		
	PVC cable, blue, IP 68, (6)		14		
	Connectable version, IP 68, (Fig. 4), (2)		07		
	Customized connection available		99		
Output signal	4...20 mA		05		
	4...20 mA surge protection		08		
Accuracy	$\leq \pm 0.25$ % FS for $p < 500$ mbar			1	
	$\leq \pm 0.1$ % FS for $p \geq 500$ mbar			2	
Temperature range	-5...50 °C compensated (allowed process temperature: -5...50 °C)			4	
	-5...80 °C compensated (allowed process temperature: -5...80 °C)			5	
Option 1	Special oil filling: Anderol Food (for food applications)				G
Option 2	Electronics packed in gel: Gauge pressure				C
	Electronics packed in gel: Absolute pressure				D
Option 3	Ballast weight 1.4435				B
	Active compensated				E
	Version titanium (without ballast weight)				K
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez (Level)				T
	Seals: NBR (ACS)				H
	Humidity filter element for gauge versions (only for PUR and PE cable)				Z
	Cutting ring connection G 1/2 M				
	Strain relief				

(1) mH₂O, mWS, mWC etc. available

- (2) Connector with required cable has to be ordered separately (KART100)
- (3) Please specify the required cable length and medium
- (4) Suitable for drinking water (food approved)
- (5) For operating temperature > 50°C, PE or FEP cable must be used
- (6) ACS Certification
- (7) min. Medium temperature -25 ° C
- (8) Standard, no special cleaning. Special cleaning must be requested.

Technical drawings

Dimensions

Fig. 1: Closed version

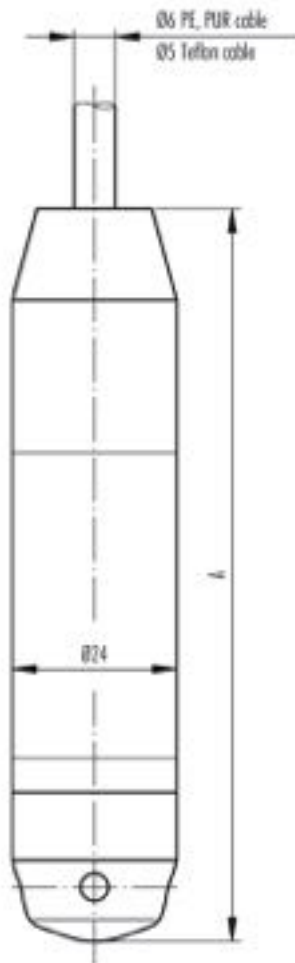


Fig. 2: Open version



Fig. 3: With process connection


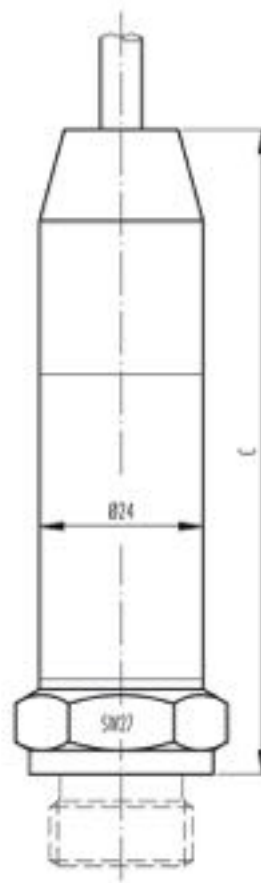


Fig. 4: Electrical connection, connectable

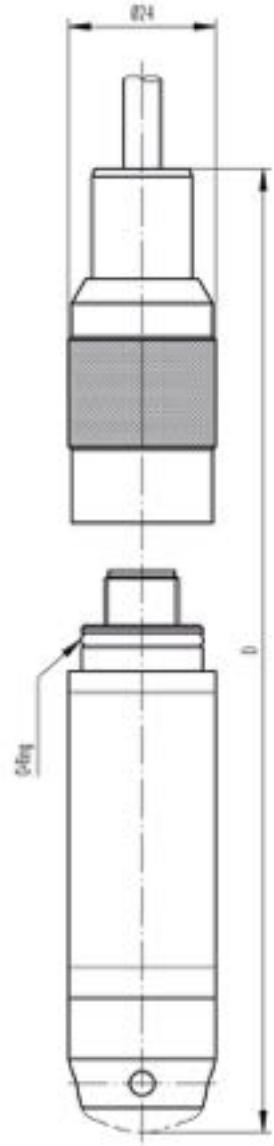


Standard and version with surge (lightning) protection

	A [mm]	B [mm]	C [mm]	D [mm]	Weight [g]	Colour
without ballast weight	137	133	on request*	on request*	approx. 200	2-Wire white +Vie yellow -Pout
with ballast weight	224	220	on request*	on request*	approx. 460	

*C: Depending on process connection

*D: Depending on process connection or version

Scheme:

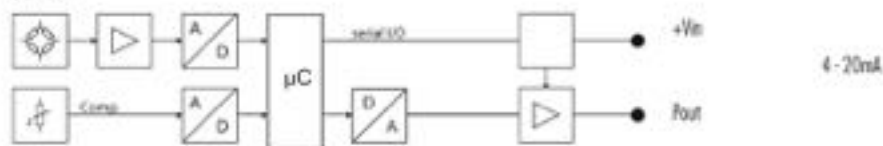

Specifications may change without notice

STG Headquarters, Switzerland
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stsenors.com | www.stsenors.com

STG France
 STS France
 B44 Route de la Caillie, 74350 Allonzier la Caillie, France
 info-fr@stsenors.com | www.stsenors.fr

STG Germany
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stsenors.com | www.stsenors.de

STG Great Britain
 STS Great Britain Ltd
 Box 2942 | Warwick | CV34 9AE, United Kingdom
 contact@stsenors.com | www.stsenors.co.uk

STG Italy
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stsenors.com | www.stsenors.it