

Programmable intrinsically submersible level transmitters

PTM/N/Ex



Version: 26.06.2014

Technical Specifications

Pressure measuring range (mH2O)

	1 ... 5	> 5 ... 20	> 20 ... 250
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 200 bar
Accuracy, (1), (\pm % FS)	$\leq \pm 0.25$	$\leq \pm 0.1$	$\leq \pm 0.1$
Thermal shift, (\pm % FS/$^{\circ}$C)			
Zero point 0...70 $^{\circ}$ C	≤ 0.06	≤ 0.03	≤ 0.015
Zero point -25...85 $^{\circ}$ C	≤ 0.08	≤ 0.04	≤ 0.02
Span 0...70 $^{\circ}$ C	≤ 0.015	≤ 0.015	≤ 0.015
Span -25...85 $^{\circ}$ C	≤ 0.02	≤ 0.02	≤ 0.02
Total error, (2), (3), (\pm % FS)			
-10...50 $^{\circ}$ C, (typ. / max.)	$\leq 0.15 / 0.3$ (≤ 200 mbar: 0.3 / 0.6)	$\leq 0.15 / 0.3$	$\leq 0.15 / 0.3$
-25...85 $^{\circ}$ C, (typ. / max.)	$\leq 0.65 / 0.7$ (≤ 200 mbar: 0.65 / 0.8)	$\leq 0.65 / 0.7$	$\leq 0.55 / 0.7$
Long term stability, (4)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

(1) Zero based accuracy according to DIN 16086, incl. hysteresis and repeatability at ambient temperature

(2) Total error including accuracy and temperature influences at maximum signal span (16 mA)



(3) Active compensated

(4) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-5...80 $^{\circ}$ C
Process temperature	-5...80 $^{\circ}$ C
Storage temperature	-10...80 $^{\circ}$ C

Electrical specifications

Resolution	0.025% FS
Output adjustable	
4 mA	-5% FS...105% FS
20 mA	-5% FS...105% FS
Span	25% FS...110% FS (≥ 0.5 mH2O)
Low pass filter	0.1 / 1 / 10 / 30 Hz (standard: 30 Hz)
Power supply	9...28 V DC
Supply influence	< 0.1% FS
Circuit diagram	
Load resistance	
Load influence	< 0.1% FS

ATEX Approval

Certificate, (1)	SEV 08 ATEX 0142		
Gas	II 1G Ex ia IIC T3 ... T6	EN 60079-0 / -11 / -26	
Dust	II 1D Ex ia IIIC IP6x T80°C ... T125°C	EN 61241-0 / -11	
Temperature class, (2)	T6	T4	T4
Ambient temperature	-5...50 °C	-5...80 °C	-5...80 °C
Process temperature	-5...50 °C	-5...50 °C	-5...80 °C
Maximum values of the connection circuit	30 V / 140 mA / 0.9W		

(1) For detailed Ex specifications see certificate and operating an safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL Approval

Certificate	60332-09 HH
Field of application	D, F, EMC1

Additional approvals

ABS	09-HG436727/1-PDA
DNV	A-11280

Qualifications

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	4g (4...100 Hz / ± 3.2 mmpp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dBµV/m (0.03...1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08...1 GHz)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω Line-Earth: 1 kV/42 Ω	Lightning
EN 61000-4-6	Conducted RF	10 V (0.15...80 MHz, 3 s)	Frequency converters

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435), titanium (Gr. 2), (1)
Housing	Stainless steel (316L / 1.4404), titanium (Gr. 2)
Seals	Viton (standard), EPDM, Kalrez
Cable	PUR, FEP

(1) Hastelloy (C-276) on request

Equipment

Overview

10.00.0091	Accessories overview

Interface

102442	PTM/Ex - Interface

Software

101224	PC Software V1.50

Additional documents

Manuals

	Article number	Description
10.00.0079	DEB003	Configuration software
10.00.0089	DEB005	User manual

Operating and safety instructions

	Article number
10.00.0271	DMM023

Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type	PTM/N/Ex	48			
Pressure type	Gauge	1			
	Absolute (vacuum)	2			
Pressure measuring range	100 mbar...25 bar	XX			
	Offset, special adjustment	99			
Process connection	Closed (Fig. 1)	55			
	Open (Fig. 2)	56			
	G 1/4 M (Fig. 3)	11			
	G 1/2 M (Fig. 3)	13			
	Customized	99			
Electrical connection	PUR cable, blue, IP 68, (2), (3)		17		
	FEP cable, blue, IP 68, (2)		22		
	Connectable version, IP 68, Lumberg RSF4		07		
Output signal	4...20 mA		05		
	4...20 mA with surge protection		08		
Accuracy	$\leq \pm 0.25$ % FS (> 500 mbar)			1	
	$\leq \pm 0.1$ % FS (≤ 500 mbar)			2	
Temperature range	T6 (Ta: -5...50 °C) -5...50 °C compensated (allowed process temperature: -5...50°C)			3	
	T4 (Ta: -5...80 °C) -5...50 °C compensated (allowed process temperature: -5...50°C)			4	
	T4 (Ta: -5...80 °C) -5...80 °C compensated (allowed process temperature: -5...80°C)			5	
Option 1	Special oil filling: Anderol Food (for food applications)				G
	Cutting ring connection G 1/2 M				
	Strain relief				
Option 2					
Option 3	Ballast weight 1.4435				B
	Active compensated				E
	Version titanium (without ballast weight)				K
	Seals: Viton (standard)				U
	Seals: EPDM				S
	Seals: Kalrez (Level)				T
	Seals: NBR (ACS)				H
	Humidity filter element for gauge version (only for PUR and PE cable)				Z

(1) mH2O, mWS, mWC etc. available

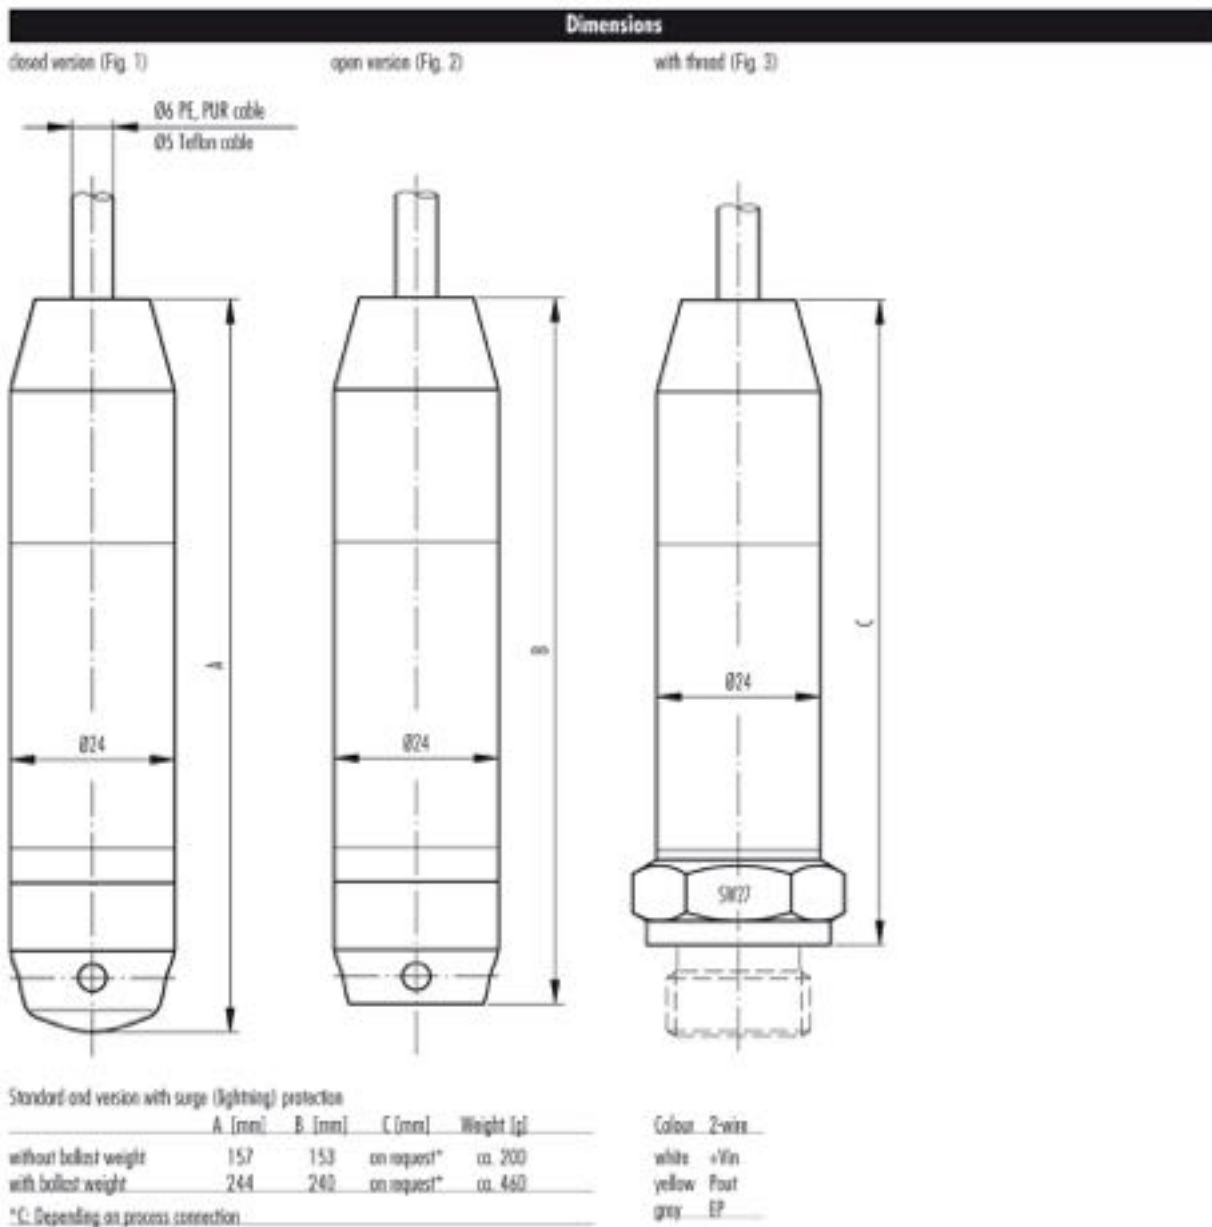
(2) Please specify the required cable length and medium

(3) For operating temperature > 50°C, FEP cable must be used

(4) min. Medium temperature -25 ° C

(5) Standard, no special cleaning. Special cleaning must be requested.

Technical drawings



Specifications may change without notice.

STG Headquarters, Switzerland
 STS Sensor Technik Sirmach AG
 Rütihofstrasse 8, 8370 Sirmach, Switzerland
 sales@stssensors.com | www.stssensors.com

STG France
 STS France
 B44 Route de la Caille, 74350 Allonzier-la-Caille, France
 info-fr@stssensors.com | www.stssensors.fr

STG Germany
 STS Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@stssensors.com | www.stssensors.de

STG Great Britain
 STS Great Britain Ltd
 Box 3942 | Warwick | CV34 9AE, United Kingdom
 contact@stssensors.com | www.stssensors.co.uk

STG Italy
 STS Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@stssensors.com | www.stssensors.it