


Switch mode DC power supply for 19"-Racks type MPS100 with one DC-Output

Technical data

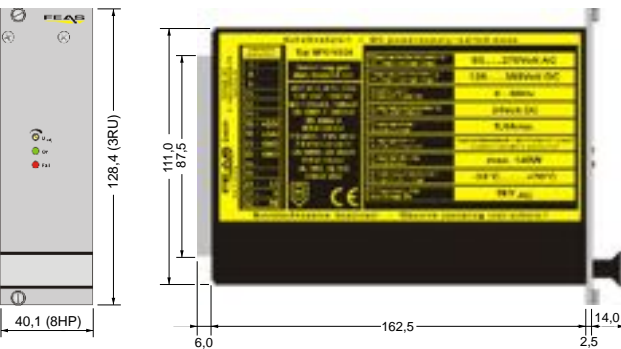

- Output separated according to VDE0551
- Extra low safety potential
PELV (EN 60204), SELV (EN 60950)
- Overload- and open-circuit protected
- Short circuit proof
- Parallel connection possible
Protected against pol-permutation at the output
- Suitable for the tropics - Epoxy resin casted
- Operating status shown by LED
- Safety acc. to VDE, EN, UL and CSA
- Connection see side two

Input data	
Input voltage AC	85 - 270 V _{AC} (0-66 Hz)
Input voltage DC	120 - 380 V _{DC}
Input current at nominal load	at 115 V _{AC} max. 1,9 A / at 230 V _{AC} max. 0,9 A
Input current peak	< 17 A at 270 V _{AC}
Protective circuit	Transient voltage suppressor varistor
Hold-up time	20ms typ.
Output data	
Output voltage U _{nominal}	see table as below
Output current I _{nominal}	see table as below
Current limiting	approx. 1,5 x I _N
Residual ripple (20MHz)	< 50 mV _{pp}
Control data	
Control deviation load	< 200 mV with load variation 10.....90%
Control deviation supply	< 10 mV with supply variation ±10%
Control time	< 10 ms with load variation 10.....90%
Operating data	
Duty circle	100%
Operating temperature range	-30°C to +70°C
Derating	from 40°C
Storage temperature range	-30°C to +105°C
Cooling	selfcooling recommended respective distance 15 mm each
Safety devices	
Input fuse	at 115V _{AC} 4,0 A delayed / at 230V _{AC} 2,0 A delayed
Output fuse	not necessary, short circuit proof
Overload protection	integrated into device
MTBF	>380.000 h without storage battery
Safety data	
Test voltage transformer	5 kV _{AC} according to VDE 0551
High voltage resistance	primary- / secondary circuit 3,75 kV _{AC} acc. to VDE
Degree of EMI suppression	according to VDE 0871B, EN 55022/B
Protection class	class 1, with PE connection (EN 60950)
Extra low safety potential	PELV (EN60204), SELV (EN 60950)
Ambient humidity	95% relative humidity, yearly average dewing allowed for use in tropical atmosphere
Protection class enclosure	IP 65
Protection class terminals	IP 20 (BGV A3)
Vibration proof	>30g at 33Hz in X,Y and Z, acc. to IEC 60068-2-27
Applied design specifications	
according to VDE	VDE 0100,0110,0113,0140-1,0551,0160/W2,0806
IEC	IEC 60950,IEC61000-6-1-2-3-4,IEC60068-2-3, IEC 60068-2-11-52,IEC 60529,IEC 380
EN	EN60950,EN61140,EN61000-6-1,EN61000-6-2, EN61000-6-3,EN61000-6-4,EN55022, EN55011, EN61000-3-2,EN61000-3-3,EN50204, EN60204, EN60529,EN61000-4-2-3-4-5-6-8-11, EN60068-1, CSA / UL
CSA / UL	CSA-C 22.2 / UL60950, UL508, UL1950
Mechanical data	
Mounting	19"-Rack 3RU 8HP
Dimensions W x H x D	40,1mm x 128,4mm x 185,0mm, Metal cassette according to DIN 41494
Weight	approx. 1,25 kg

Type	MPS10005	MPS10012	MPS10015	MPS10024	MPS10048
Order number	583105	583112	583115	583114	583116
Nominal output voltage	5,0 V _{DC}	12,0 V _{DC}	15,0 V _{DC}	24,0 V _{DC}	48,0 V _{DC}
Range of adjustment	4,7-5,9 V _{DC}	11,5-16,0 V _{DC}	11,5-16,0 V _{DC}	22,5-30,0 V _{DC}	45,0-60,0 V _{DC}
Nominal output current	15,0 Amp.	10,0 Amp.	8,0 Amp.	5,0 Amp.	2,5 Amp.
Power	75 Watt	120 Watt	120 Watt	120 Watt	120 Watt
Efficiency	85%	85%	85%	87%	87%
Dimensions (W x H x D)	40,1x128,4x185	40,1x128,4x185	40,1x128,4x185	40,1x128,4x185	40,1x128,4x185
Weight	approx. 1,25 kg	approx. 1,25 kg	approx. 1,25 kg	approx. 1,25 kg	approx. 1,25 kg



P.O. Box 1521
D - 22905 Ahrensburg

Phone: +49 4102 42082
Fax: +49 4102 40930

E-mail : contact@feas.com
Internet: www.feas.com

Switch mode DC power supply for 19"-Racks type MPS100 with one DC-Output

Design with anodized front plate for 19" rack



Connection type

power conector type H acc.
to DIN41612 / IEC 60603-2

