

Intrinsically safe pressure transmitters

ATM.ECO/Ex



Version: 02.11.2015

Technical Specifications

Pressure measuring range (bar)

	0.1 ... 0.5, (1)	> 0.5 ... 2	> 2 ... 100
Overpressure	3 bar	3 x FS (≥ 3 bar)	3 x FS
Burst pressure	> 200 bar	> 200 bar	> 850 bar
Accuracy, (4), (\pm % FS)	≤ 0.25	≤ 0.25	≤ 0.25
Total Error, (5), (\pm % FS)			
0 ... 70°C, (typ. / max.)	$\leq 1.0 / 1.5$	$\leq 0.7 / 1.0$	$\leq 0.7 / 1.0$
-25 ... 100°C, (typ. / max.)	$\leq 2.0 / 2.5$	$\leq 1.0 / 1.5$	$\leq 1.0 / 1.5$
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (6)	< 0.5% FS / < 4 mbar	< 0.2% FS / < 4 mbar	< 0.1% FS / < 0.2% FS

	> 100 ... 600, (2), (3)	> 600 ... 1000
Overpressure	3 x FS ($\leq 850 / \leq 1500$ bar)	1500 bar
Burst pressure	> 850 / ≤ 1500 bar	> 1500 bar
Accuracy, (4), (\pm % FS)	≤ 0.25	≤ 0.25
Total Error, (5), (\pm % FS)		
0 ... 70°C, (typ. / max.)	$\leq 0.7 / 1.0$	$\leq 0.7 / 1.0$
-25 ... 100°C, (typ. / max.)	$\leq 1.0 / 1.5$	$\leq 1.0 / 1.5$
Response time, (typ.)	< 1ms / 10 ... 90% FS	< 1ms / 10 ... 90% FS
Long term stability, (6)	< 0.1% FS / < 0.2% FS	< 0.1% FS / < 0.2% FS

(1) 50 mbar on request

(2) Overpressure and burst pressure 1500 bar (stainless steel) optional

(3) Process connection frontal and flush diaphragm available ≤ 600 bar

(4) Zero based accuracy according to DIN-16086, incl. hysteresis and repeatability at ambient temperature

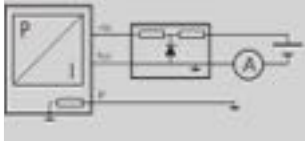
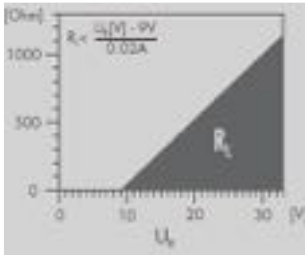
(5) Total error including accuracy and temperature influences at maximum signal span (16 mA)

(6) 1 year (typ. / max.), the long term stability can be improved by ageing (burn-in) the sensor

Temperature range

Operating temperature	-40 ... 125°C
Process temperatur	-40 ... 150°C
Storage temperatur	-40 ... 125°C

Electrical specifications

	4 ... 20 mA
Power supply	9 ... 28 VDC
Supply influence	< 0.05% FS
Circuit diagram	
Load resistance	
Load influence	< 0.05% FS

ATEX Approval

Certificate, (1)	SEV 09 ATEX 0108		
Gas	II 1G Ex ia IIB/IIC T3 ... T6	EN 60079-0 / -11 / -26	
Dust	II 1D Ex ia IIIC IP6x T140°C ... T70°C	EN 61241-0 / -11	
Mining	I M1 Ex ia I	EN 50303	
Temperature class, (2)	T6	T4	T3
Ambient temperature	-40 ... 50°C	-40 ... 85°C	-40 ... 125°C
Process temperature	-40...50 °C	-40...110 °C	-40...150 °C
Maximum values of the intrinsically safe circuit	28V / 93 mA / 0.65W		

(1) For detailed Ex specifications see certificate and operating and safety instructions

(2) Without any information about temperature class the transmitter will be delivered for T4

GL Approval

Certificate	75877-09 HH
Field of application	C, F, EMC1

Additional approvals

IEC Ex	IEC Ex SEV 10.0003
FM	3027351
FM C*	3038239

Qualifications

	Description	Level	Typical interferences
EN 60068-2-6	Vibration	10g (4...2000 Hz / ± 10 mpp)	
EN 60068-2-27	Shock	100g (impulse duration 6 ms)	
EN 55022	Emission, class B	< 30 dBµV/m (0.03 ... 1 GHz)	
EN 61000-4-2	Electrostatic discharge	8 kV contact 15 kV air	
EN 61000-4-3	Irradiated RF	10V/m (0.08 ... 2.7 GHz, 3s)	Radio sets, wireless phones
EN 61000-4-4	Transients (burst)	4 kV	Motors, valves
EN 61000-4-5	Surge	Line-Line: 0.5 kV/42 Ω Line-Earth: 1 kV/42 Ω	Overvoltage
EN 61000-4-6	Conducted RF	10 V (0.15 ... 80 MHz, 3 s)	Frequency converters

Physical specifications

Materials	
Transducer	Stainless steel (316L / 1.4435)
Housing	Stainless steel (316L / 1.4404)
Seals	Viton (Standard), EPDM, Kalrez
Cable	PUR, FEP

Equipment

Overview

10.00.0091	Accessories overview
HART001	Cable Socket Connector
HART002	Cable socket connector, Binder 723, IP67, 5-pins

Additional documents

Operating and safety instructions

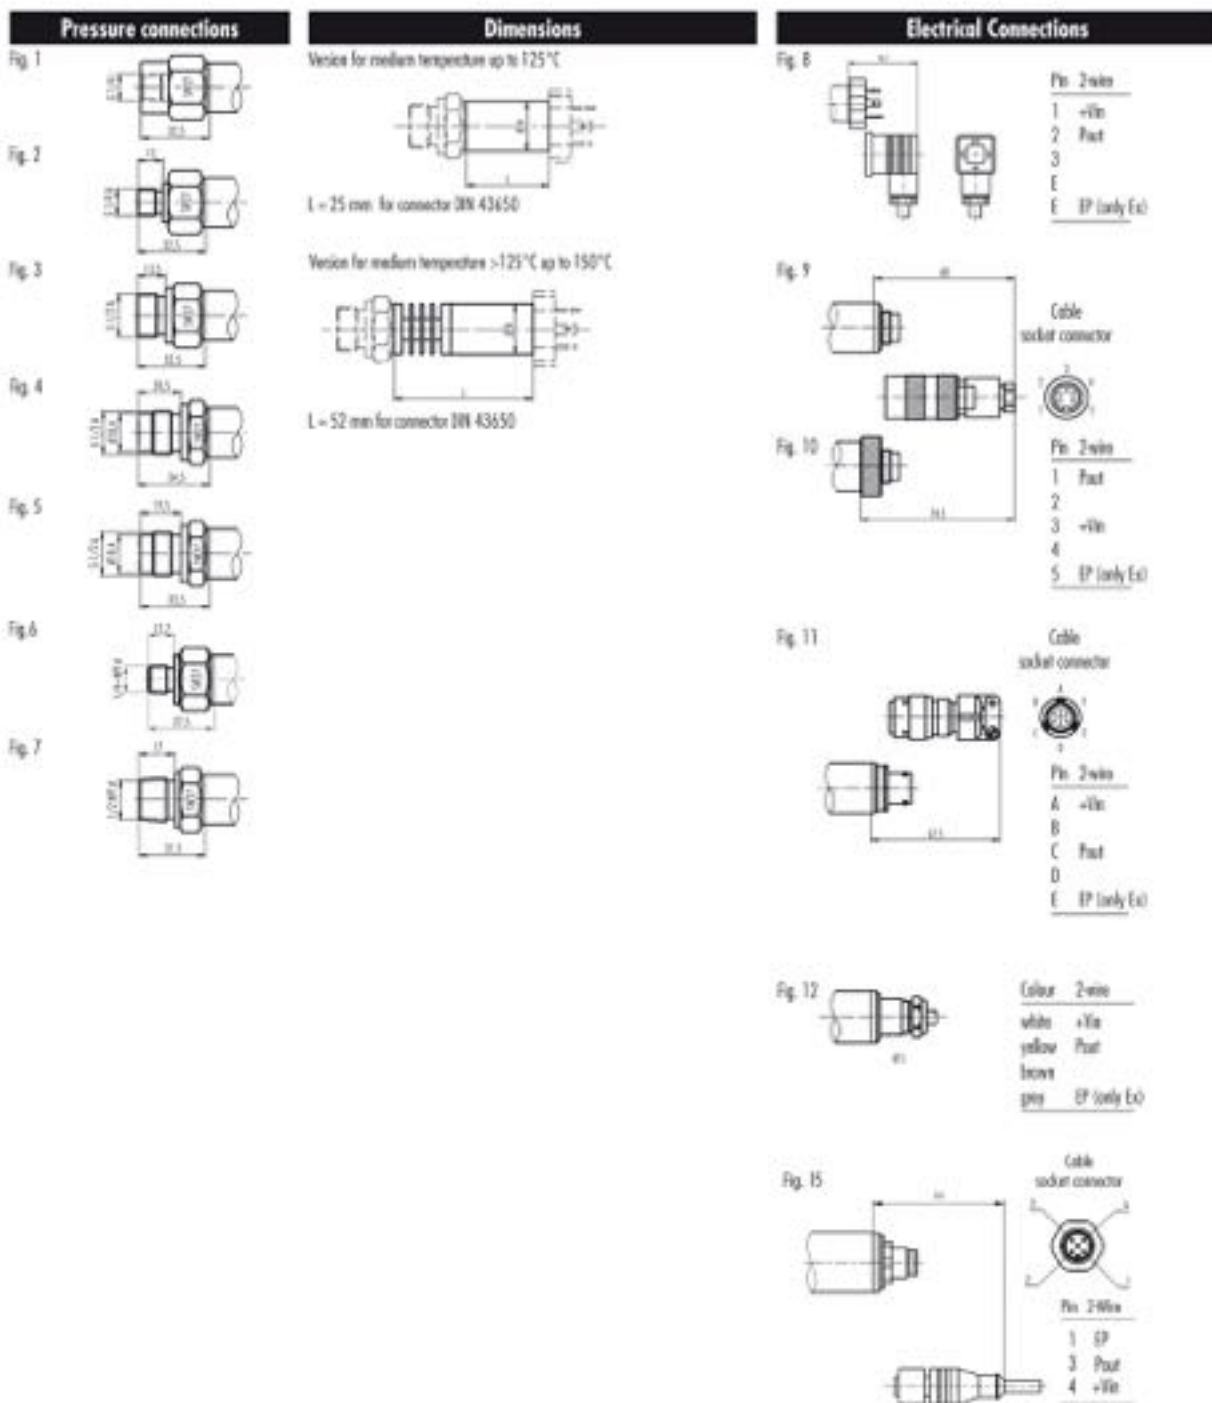
	Article number
10.88.0092	DMM029

Ordering information

		X. XXXX.	XXXX.	XX.	XXX
Type	ATM.ECO/Ex				
Pressure type	Gauge	1			
	Absolute (vacuum)	2			
	Sealed gauge	3			
Pressure measuring range	100 mbar ... 600 bar	XX			
	> 600 bar	XX			
Process connection	G 1/4 F (Fig. 1)	00			
	1/4 NPT M (Fig. 6)	10			
	1/2 NPT M (Fig. 7)	19			
	G 1/4 M (Fig. 2)	11			
	G 1/4 M, manometer DIN-16288	12			
	G 1/2 M (Fig. 3)	13			
	G 1/2 M, frontal diaphragm (Fig. 4), (3)	14			
	G 1/2 M, flush diaphragm (Fig. 5), (3)	15			
	G 1/2 male, manometer DIN-16088	16			
	G 1/2 male with bore Ø 14 mm	17			
	Customized	99			
Electrical connection	DIN-43650, demountable, IP 65 (Fig. 8), (4)		01		
	DIN-43650, with metal threaded part, demountable		66		
	Binder 723, 5 pins, IP 67 (Fig. 9), (4)		03		
	Binder 723, 5 pins, demountable, IP 67 (Fig. 10), (4)		43		
	MIL C26482, 10-6, IP 40 (Fig. 11), (4)		06		
	Lumberg RSF4, 4 pins (Fig. 15), (4)		07		
	PUR cable, blue, IP 67 (Fig. 12), (5), (6)		17		
	FEP cable, blue, IP 67 (Fig. 12), (5)		22		
	Customized		99		
Output signal	4 ... 20 mA		05		
Accuracy	≤ ± 0.25 % FS			1	
Temperature range	T6 (Ta: -40 ... 50°C) 0 ... 70°C compensated (allowed process temperature: -40 ... 50°C)			0	
	T4 (Ta: -40 ... 85°C) -25 ... 100°C compensated (allowed process temperature: -40 ... 110°C)			1	
	T3 (Ta: -40 ... 125°C) -25 ... 100°C compensated (allowed process temperature: -40 ... 150°C) with cooling fins			2	
Option 1	Throttle, (7)				A
	Special oil filling: Anderol Food (for food applications)				G
	Special oil filling: AS100				J
	Special oil filling: PAO4 (silicone free)				Q
Option 2					
Option 3	Seals: Viton (standard)				U
	Seals: EPDM				S

- (1) 50 mbar on request
- (2) mbar, PSI, kPa etc. available
- (3) Process connection available ≤ 600 bar
- (4) Cable socket connector not included
- (5) Please specify the required cable length and medium
- (6) For operating temperature $> 50^{\circ}\text{C}$, FEP cable must be used
- (7) Only with pressure connection Fig. 2, Fig. 3, Fig. 6 and Fig. 7

Technical drawings



Specifications may change without notice.

ST5 Headquarters, Switzerland
 ST5 Sensor Technik Simach AG
 Rütihofstrasse 8, 8370 Simach, Switzerland
 sales@st5sensors.com | www.st5sensors.com

ST5 France
 ST5 France
 844 Route de la Caillé, 74350 Allonzier la Caillé, France
 info-fr@st5sensors.com | www.st5sensors.fr

ST5 Germany
 ST5 Sensoren Transmitter Systeme GmbH
 Poststrasse 7, 71063 Sindelfingen, Germany
 info-de@st5sensors.com | www.st5sensors.de

ST5 Great Britain
 ST5 Great Britain Ltd
 Box 1942 | Warwick | CV34 9AE, United Kingdom
 contact@st5sensors.com | www.st5sensors.co.uk

ST5 Italy
 ST5 Italia s.r.l.
 Via Gesù 5, 20090 Opera (Milano), Italy
 info-italia@st5sensors.com | www.st5sensors.it